

PROLAKE⁵ 370 For impoundments up to 14 acres

- Fracking Pond Applications
- Delivers Over 8 CFM 24/7
- Utilizes Tough Dual Duraplate[™] Diffusers
- Rugged Design To Withstand Harsh Environments

Impoundment Package Features

23.2 HP Oilless Regenerative Blower 370 CFM Open Flow 34.5Y Amps Start@460V 460/60/3 Maximum 281" Water Column Differential Pressure Outlet Adapter With Pressure Relief Valve Blow-Off Valve Flexible High Temperature Vibration Isolator Hose Inlet Fitting Includes Industrial Air Filter With Replaceable Element Electrical Panel/NEMA Outdoor Rated Manual Motor Starters TEFC Motor Class F Insulation UL Listed

60' Galvanized Metal Compressor Outlet Air Pipe - 3" (For Heat Dissipation With Appropriate Fittings To Hairpin & Connection To Blower)

Up To 20 Dual Duraplate[™] Air Diffusers Depending On Final Size

Between 11,000 To 14,000 Feet Of 3/4" Alpine™ Weighted Airline Depending On Final Size

Between 1200 To 1500 Feet Of 3/4" Gates Adaptaflex™ Tubing Depending On Final Size



6.17HP Oilless Regenerative Blower



Duraplate[™] Dual Diffuser



Alpine[™] ¾" Weighted Airline



Black ¾" Adapaflex™ Airline



40' Galvanized Metal Compressor Outlet Air Pipe - 2"


Product Notes

Electrical panel and blower rated for outdoor installation, blower mounted on galvanized steel pallet all-welded construction outdoor/industrial rated, ready to set and connect. Control panel shipped loose for site installation on power pedestal by customer's electrician. System includes fittings and clamps to install 3/4" Alpine[™] Weighted Tubing and Diffusers. Includes clamps and fittings to connect 3/4" Adaptaflex to 3/4 Alpine[™] Self Weighted Tubing at toe of berm (in most cases). Installation, customer to provide 2" End Welded Air Distribution Trunk Manifold and 3/4" Airflow Adjustment (Ball) Valves (Qty. 20) with Male Adapter (3/4" Npt X 3/4" Spiral Barb) for each Airflow Outlet on Trunk Manifold.



PROLAKE⁵ 370 FOR IMPOUNDMENTS UP TO 14 ACRES

- Fracking Pond Applications
- Delivers Over 8 CFM 24/7
- Utilizes Tough Dual Duraplate[™] Diffusers
- Rugged Design To Withstand Harsh Environments

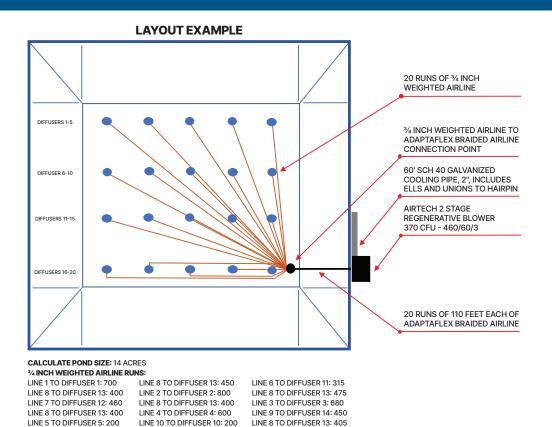

LINE 8 TO DIFFUSER 13: 400

LINE 8 TO DIFFUSER 13: 400